

# SecureMag™

## Encrypted Intelligent MagStripe Swipe Reader

### Full Functionality & Compact Size

SecureMag™ is a 100mm magnetic stripe card reader that offers retailers a complete and reliable security solution. This intelligent reader delivers superior reading performance while encrypting sensitive data that complies with PCI-DSS requirements. The SecureMag ensures all data transactions are protected from end to end reducing fraud and data compromises. Data encryption prevents card holder information from being accessed when data is stored or in transit. It also allows customers the flexibility to choose a decryption party right for them. The SecureMag supports TDES and AES data encryption using DUKPT key management.

### Security Management


Each SecureMag card reader is assigned a unique serial number for tracking purposes. Encrypted data output with confirmation data in clear text form is programmable up to the first six digits and the last four digits of the account number. For increased data protection, SecureMag has several operational security levels allowing the user to select the security profile needed for the application.

### Easy to Use & Install

The uniquely designed flat surface allows for mounting in different orientations using threaded inserts or Velcro®. The cable can exit through the side or bottom which provides flexibility in mounting options.

## Features and Benefits:

- Reader can function as a standard reader, or can be configured to an encrypted reader
- Each device includes a unique serial number
- Provides clear text confirmation data including card holder's name and a portion of the PAN as part of the masked track data
- Powered through USB port, no external power supply required
- Bidirectional card reading
- Reads encoded data that meets ANSI/ISO/AAMVA standards and most custom formats such as ISO track one format on track two or three
- Reads up to three tracks of card data
- Clear identification of successful card reads with a beeper and tricolored LED indicators
- Supports TDES & AES encryption (TDES is standard)
- DUKPT key management

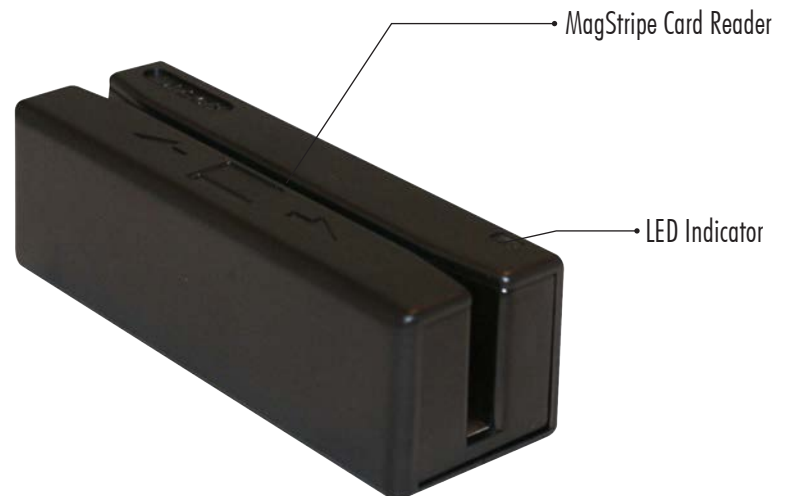

# SecureMag™

## Specifications IDRE-33XXXX

### Electrical

Power Requirements:	+5 VDC +/- 10%, 50mV ripple maximum USB Keyboard, USB-HID 5.5mA typical with LED, 8mA peak
Interfaces:	USB Keyboard and USB-HID
Card Speed:	5 to 65 ips (7.6 to 165 cm/s)

### Environmental

Operating Temperature:	32° F to 131° F (0° C to 55° C)
Storage Temperature:	-22° F to 149° F (-30° C to 65° C)
Humidity:	Maximum 95% non-condensing, dry storage

### Reliability

Operating Life:	1,000,000 cycles minimum
Conformance:	ISO 7811 1-6
Warranty:	One year, parts and labor

### Mechanical

Dimension (L)x(W)x(H):	3.94 inches (100 mm) x 1.38 inches (35 mm) x 1.18 inches (30 mm)
Media Thickness:	0.015 inches (0.381mm) minimum 0.035 inches (1.12mm) maximum
Media Formats	ISO 7811, AAMVA, and CA DMV
Swipe Speed:	3 to 60 inches per second, bidirectional
Cable Length:	6-foot side exit cable (Bottom exit is an option)
Slot Width:	0.050 inches (1.37 mm)
Weight:	7 oz.
Indicators:	Tricolored LED, beeper
Footprint:	

### United States Sales Office

#### Corporate Headquarters

10721 Walker Street  
Cypress, CA 90630  
Phone: (714) 761-6368  
Toll Free: (800) 984-1010  
Fax: (714) 761-8880  
sales@idtechproducts.com

### International Sales Offices

#### Asia

+866-3-496-6988 (Taiwan)  
asia@idtechproducts.com.tw

#### Canada

+416-432-4131  
martinm@idtechproducts.com


#### South America

+55-11-3079-2255  
internationalsales@idtechproducts.com

#### Europe

+011-44-1925-269550  
emea@idtechproducts.com

**ISO 9001 Certified**  
**ISO 140001 Certified**

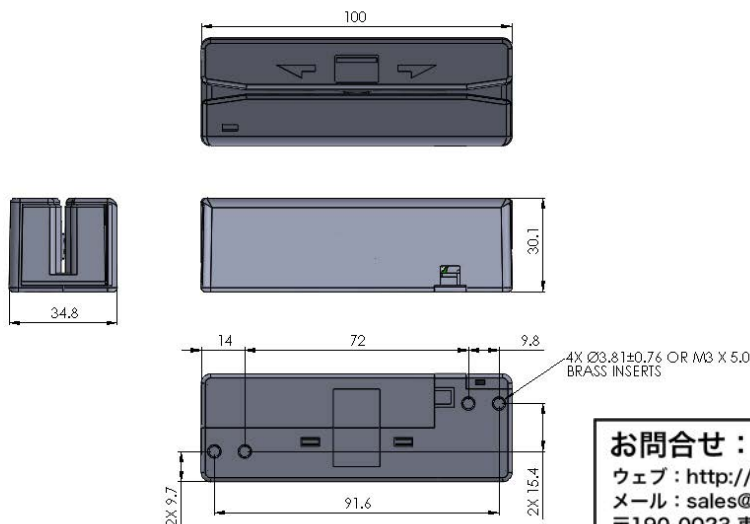

お問い合わせ：株式会社 PA データサービス

ウェブ：http://www.padata.co.jp

メール：sales@padata.co.jp

〒190-0023 東京都立川市柴崎町 2-2-23

松村ビル 2F

**PA DATA**  
SERVICE

www.idtechproducts.com